

GuestFridge 50 Slim - Stainless Steel Glass Door

GuestFridge 50 Slim's have been quality engineered – with generous internal cabinet space, simple and stylish design, extremely low energy consumption and is a great value for all hotels.

Hotels are now able to offer guests the amenity they ask for and benefit from our fundamental commitment to develop sustainable products. Fridges come standard with interior LED light and internal racks.

Standard Features

- ADA Compliant
- Quiet compressor technology
- Removable glass shelving for easy cleaning
- Thermal insulation manufactured with eco-friendly cyclopentane
- Adjustable thermostat
- Strong universal door hinges convertible left to right
- All-round magnetic seals to keep the door perfectly shut
- Integrated door handles
- Triple pane glass door
- Internal LED light
- Automatic defrost
- Anti-tilt brackets

Technical Specifications

GuestFridge 50 Slim SSGD	
Capacity (liters / cubic feet)	33L / 1.17Cu.Ft
Dimensions HxWxD (inches) (mm)	20.5 x 17 x 16.14 520 x 432 x 410
Door Options	Stainless Steel Glass Door
Door Hinge	Universal
Chrome Shelves / Door Racks*	2 / 0*
Watts (W)	85
Voltage (V) / Frequency	110V / 60Hz 220V / 50Hz
Energy Consumption**	0.62 kWh/24 hr**
Net Weight (lbs / kgs)	33 / 15
Certification	CCC/CB/CETL/CE/GS/RoHS/UL/CSA ISO 9001 2008/ISO 14001 2004

*No door racks available on glass doors

**Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371.




Stainless Steel Glass Door



Ventilation

A minimum opening of 31 in² (200 cm²) for Intake, Shelf Cutout and Exhaust is required for proper ventilation.

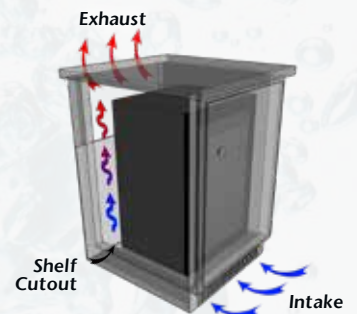

www.MinibarSystems.com

DOC0261_GuestFridge_50_Slim_CS_SSGD

MINIBAR SYSTEMS
smart bars • smart people • smart solutions

Minibar North America
7340 Westmore Road
Rockville, MD 20850
tel 301 354 5055
fax 301 309 1115
info@minibarNA.com